




Air-Supported Threading! Create the Look of a Professional Finish!

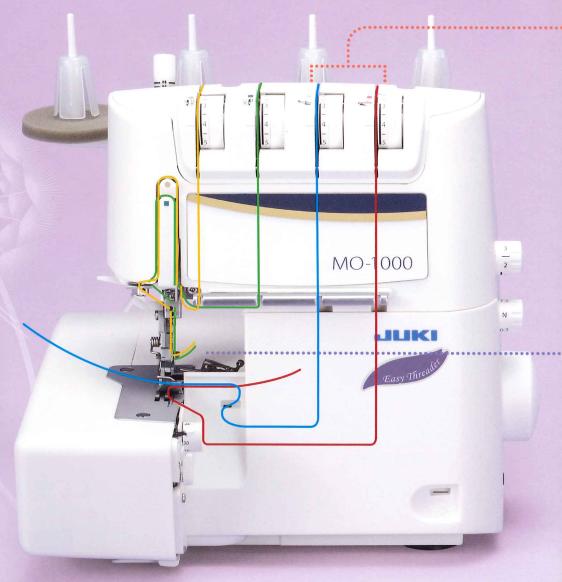

MO-1000

JAN:4946973008093

SPECIFICATIONS

Dimensions: $330(W) \times 280(D) \times 310(H)$ mm

Weight: 9.0kg

Adjustable Differential Feed Stretchy fabrics Crinkly fabrics

Even with easily stretched fabrics such as knits and georgette, create beautifully sewn finishes by adjusting

Beautiful Sharp Curve

The distance between the needle and knife is 9.95mm (conventional model: 15.5mm), allowing, you to



Switch to 2-Thread sewing simply by pushing the 2-/3-thread changeover attachment to the




The height of the throat is 72.4mm. Due to this height, the usability of the work space



Convenient Threading With the Easy Threader

Using the new easy threader feature, easily thread the machine from the threading hole to the looper with the power of a strong whoosh of air sent from the electric motor. This amazing function dramatically alters upper and lower looper threading.





Upper looper thread



Insert 1 to 2 cm of thread.



Press the air-control pushbutton.




And you're done! The machine was simply threaded by air.



Automatic Needle Threader

Quickly thread the needle! With the automatic needle threader, the needle is threaded in 3 easy steps.



Left needle thread



Lower the threading lever.



Hook the thread.



Return the lever to finish threading.

Quiet Operation



The sound reducing design minimizes the operating noise and the unit sews with less vibration.

- Automatic rolled hemming
- Adjustable presser foot pressure
- Option to deactivate upper knife
 Cutting width adjusting dial
- Safety feature preventing operation when the presser foot is upper position or the cover is open.

Other Useful Features

Thread trimming blade for easy thread cutting

LED Sewing Light

The needle area is brightly illuminated. The long-life, anaray officient and one fri

Waste Collector



Provided as a standard accessory, the waste collector catches cut-off fabric and is useful for keeping the

MO-1000 Standard Specifications	
reads	2/3/4 Threads
	Household Machine Size 11 or 14
Left Needle	5~9mm
Overlocking Width Rolled Hem	3~7mm
	2mm
le .	1~4mm (Standard : 2.5 mm)
eed	0.7~2.0 Ratio
	Left Needle Right Needle Rolled Hem



Optional attachments

Blind Stitch Presser Foot



Part No. 40138091

Elasticator Presser Foot



Part No. 40138095

Cording Presser Foot



Part No. 40138099

Beading Presser Foot




Part No. 40138106

Piping Presser Foot



Part No. 40138103





Part No. 40138121



JUKI CORPORATION

2-11-1, TSURUMAKI, TAMA-SHI, TOKYO 206-8551, JAPAN http://www.juki.co.jp

JUKI ECO PRODUCTS

This is an eco-friendly product which complies JUKI ECO PRODUCTS standards for protecting the environment.



The sewing machine complies with the "JUKI Group Green Procurement Guidelines" on the use of hazardous substances, which is stricter than other restrictions, such as those of the RoHS Directive.

For details of JUKI PRODUCTS, refer to: http://www.juki.co.jp/eco_e/index.html

*The RoHS Directive is an EU Directive limiting the use of 6 hazardous substances (lead, hexavalent chromium, mercury, cadmium, PBB and PBDE) in electrical and electronic equipment. The Juki Green Procurement Guideline is the voluntarily established criteria to eliminate not only the aforementioned six substances, but also other ones which also adversely affect the environment.